


Highly stabilized and precise fluxgate technology based current transducer, re-engineered for cost sensitive, non-intrusive, isolated DC and AC current measurement applications up to 300A

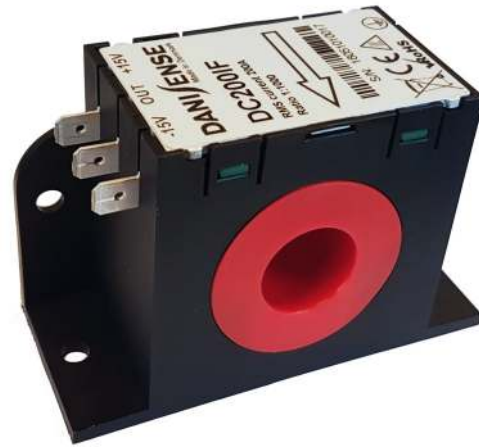

Features

- Linearity error maximum 6 ppm
- Offset maximum 40 ppm—equivalent to 1.5mA
- Fluxgate, closed loop compensated technology with fixed excitation frequency and second harmonic zero flux detection for enhanced accuracy and stability
- Industry standard 6.3 x 0.8mm faston connection
- Cost focused high performance transducer
- DC and AC current metering with +/-0.1% absolute accuracy up to 5kHz

Applications:


- Gradient amplifiers for MRI devices
- Precision power supplies, drives
- Batteries testing and evaluation systems
- Variable speed motor drives

Specification highlights	Symbol	Unit	Min	Typ.	Max
Nominal primary AC current	IPN AC	Arms			200
Nominal primary DC current	IPN DC	A			300
Measuring range	\hat{I}_{PM}	A			300
Primary / secondary ratio	n1 : n2		1:1000		1:1000
Linearity error	ϵ_L	ppm	-6		6
Offset current (including earth field)	I_{OE}	ppm	-40		40
DC-10Hz Overall accuracy @25°C (= $\epsilon_L + I_{OE}$)	acc ϵ	ppm	-46		46
AC Maximum gain error from DC to 10Hz	ϵ_G	%			±0.01
Operating temperature range	Ta	°C	-40		+85
Power supply voltages	Uc	V	±14.25		±15.75


Electrical specifications at Ta=23°C, supply voltage = ± 15V unless otherwise stated

Parameter	Symbol	Unit	Min	Typ.	Max	Comment	
Nominal primary AC current	$I_{PN AC}$	A _{rms}			200	Refer to fig. 1 & 2 for derating	
Nominal primary DC current	$I_{PN DC}$	A	-300		300	Refer to fig. 1 for derating	
Measuring range	I_{PM}	A	-330		330	Refer to fig. 1 & 2 for derating	
Overload capacity	\hat{I}_{OL}	A			1000	Non-measured, 100ms	
Nominal secondary current	I_{SN}	mA	-300		300	At nominal primary DC current	
Primary / secondary ratio			1:1000		1:1000		
Measuring resistance	R_M	Ω	0		12	Refer to fig. 1 for details	
Linearity error	ϵ_L	ppm μA	-6		6	ppm refers to nominal current μA refers to secondary current	
			-1.8		1.8		
Offset current (including earth field)	I_{OE}	ppm μA	-40		40	ppm refers to nominal current μA refers to secondary current	
			-12		12		
DC-10Hz Overall accuracy @25°C (= $\epsilon_L + I_{OE}$)	acc ϵ	ppm	-46		46	ppm refers to nominal DC current	
Offset temperature coefficient	TC_{IOE}	ppm/K $\mu A/K$	-3		3	ppm refers to nominal current μA refers to secondary current	
			-0.9		0.9		
Bandwidth	$f(-3dB)$	kHz	1000			Small signal, graphs figure 3	
Amplitude error	ϵ_G	%			0.01%	% refers to nominal current	
					10Hz–5kHz		1.50%
					5kHz-100kHz		10.0%
Phase shift	θ	°			0.06°		
					100kHz - 1000kHz		0.5°
					5kHz-100kHz		3.0°
Response time to a step current I_{PN}	$tr @ 90\%$	μs		1		$di/dt = 100A/\mu s$	
Noise	noise	ppm rms			0.08	Measured on secondary current	
					0 - 100Hz		0.16
					0 - 1kHz		1.60
					0 - 10kHz		6.00
0 - 100kHz							
Fluxgate excitation frequency	f_{exc}	kHz		15.6			
Induced rms voltage on primary conductor		μV rms			5		
Power supply voltages	U_c	V	±14.25		±15.75		
Positive current consumption	I_{ps}	mA			32	Add I_s (if I_s is positive)	
Negative current consumption	I_{ns}	mA			33	Add I_s (if I_s is negative)	
Operating temperature range	T_a	°C	-40		85		
Stability							
Offset stability over time		ppm / month	-10		10	ppm refers to nominal current μA refers to secondary current	
			-3		3		


Measurement resistor R_M and ambient temperature derating (Fig. 1)

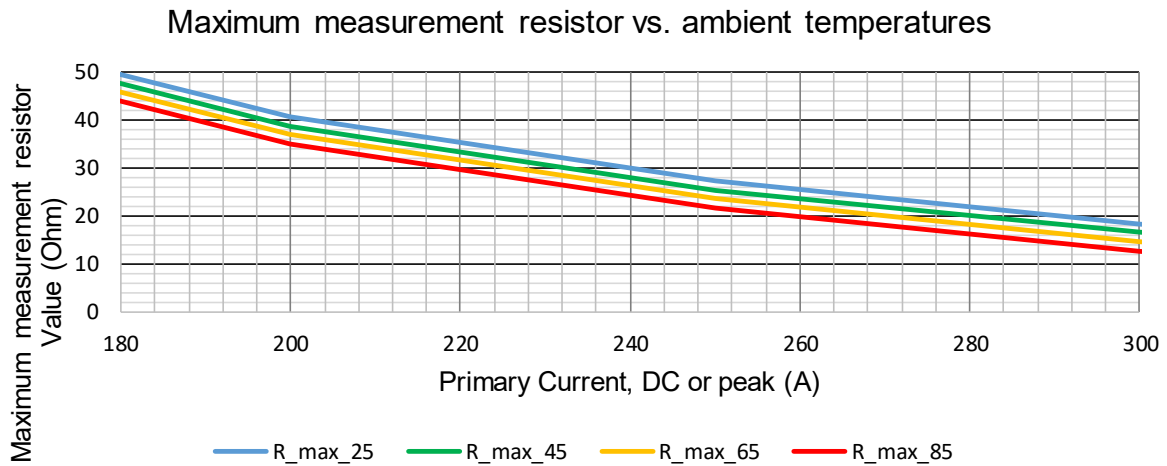

Frequency and ambient temperature derating (Fig. 2)

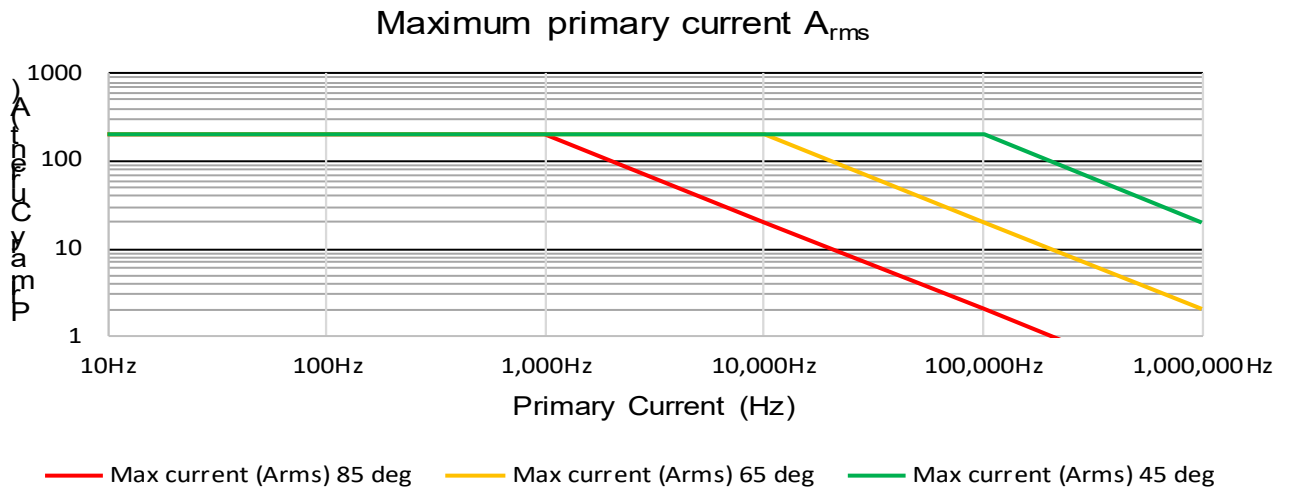

Frequency characteristics (Fig. 3)

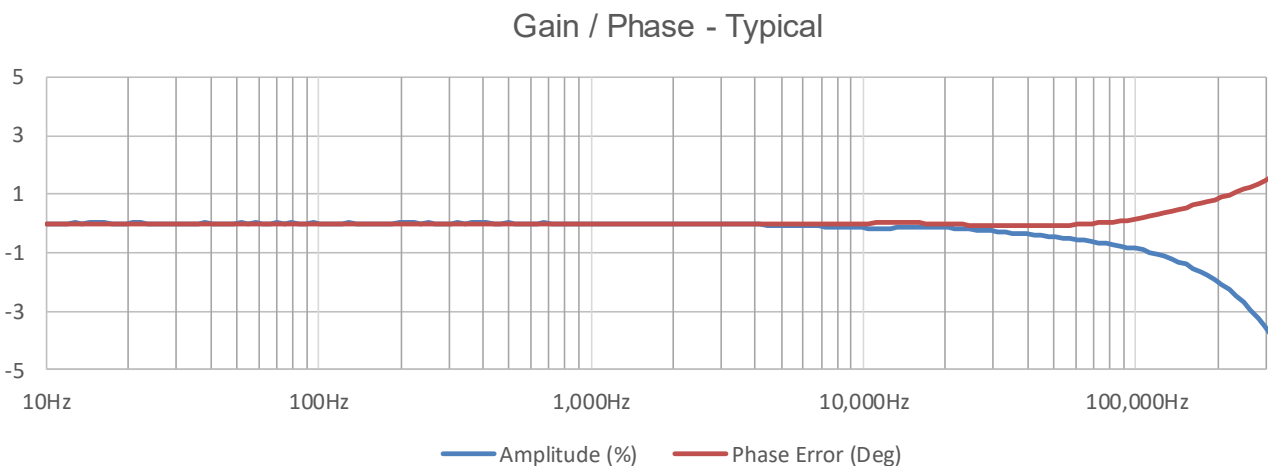

Isolation specifications


Parameter	Unit	Value
Clearance	mm	9
Creepage distance	mm	10
Comparative tracking index (CTI)	V	> 600
Rms voltage for AC isolation test, 50/60 Hz, 1 min - Between primary and (secondary and shield (GND))	kV	5.7
Impulse withstand voltage (1.2/50µs)	kV	10.4
Rated rms isolation voltage reinforced isolation, overvoltage category III, Pollution degree 2 according to IEC 61010-1 and EN50780	V	300 600

Absolute maximum ratings

Parameter	Unit	Max	Comment
Primary	kA	1.5	Maximum 100ms
Power supply	V	±16.5	


Environmental and mechanical characteristics

Parameter	Unit	Min	Typ	Max	Comment
Operating temperature range	°C	-40		85	
Storage temperature range	°C	-40		85	
Relative humidity	%	20		80	Non-condensing
Mass	kg		0.200		
Connections	4 Industrial faston 6.3 x 0.8mm				
Standards	EN 61326-1 EMC				

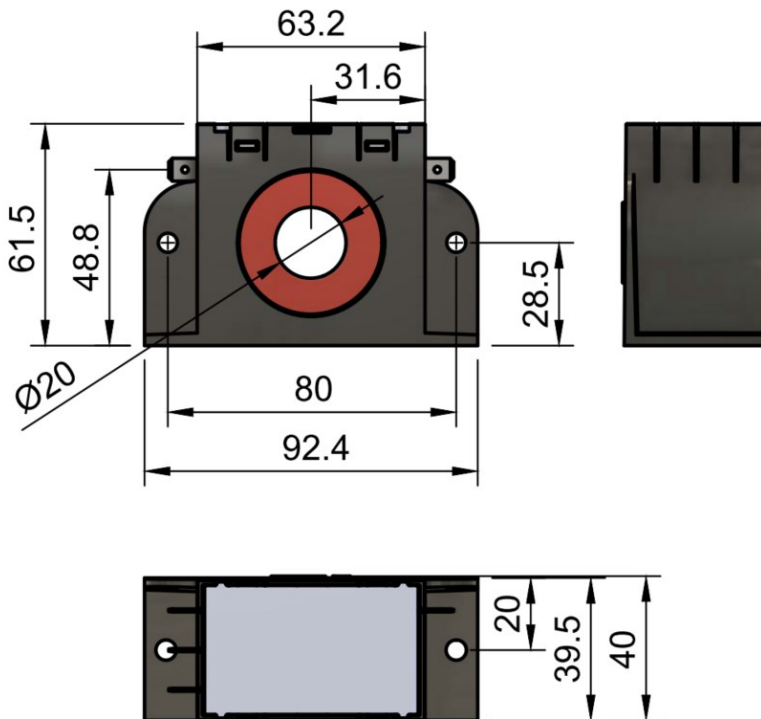

(general tolerance 0.3mm unless)

DC200IF connection

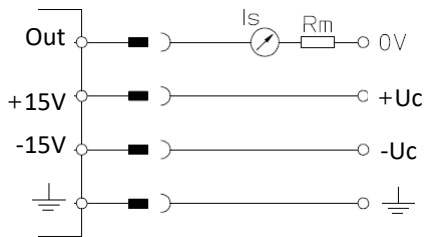

Positive current direction

Is identified by an arrow on the transducer label

CAUTIONS:

- PLEASE IMPERATIVELY RESPECT CONNECTION POLARITIES TO PREVENT DESTRUCTION OF THE TRANSDUCER
- PLEASE ENSURE ADEQUATE CURRENT AND VOLTAGE RATING OF POWER SUPPLIES TO AVOID SATURATION

Mounting instructions

- Base plate mounting 2 holes $\phi 5.5$
- Side mounting 2 holes $\phi 5.5$